BRETFORD

TVCA3654

ADJUSTABLE CABINET CART

Assembly Instructions

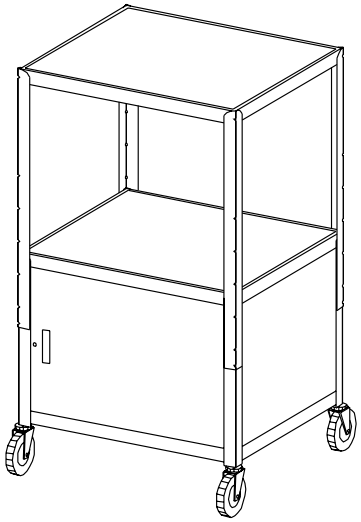

PARTS LIST

Qty	Part#	Description
4	010-4123	Legs
1	022-1621	Top Shelf
1	022-2376	Base w/ Cabinet
2	015-0002	4" Casters w/o Lock
2	015-0003	4" Casters w/ Lock

HARDWARE LIST

Ref	Qty	Part#	Description
AA	12	030-0253	1/4-20 x 3/4" Combo Round Head Screw
BB	12	030-0120	1/4-20 Square Nut

TOOLS REQUIRED

Phillips Screwdriver
Rubber Mallet

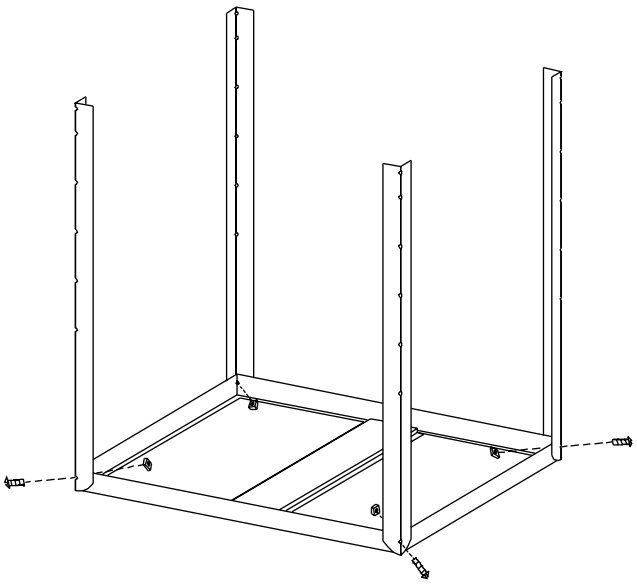

STEP 1

Attach each leg to the corners of the top shelf as shown using screws (AA) and nuts (BB).

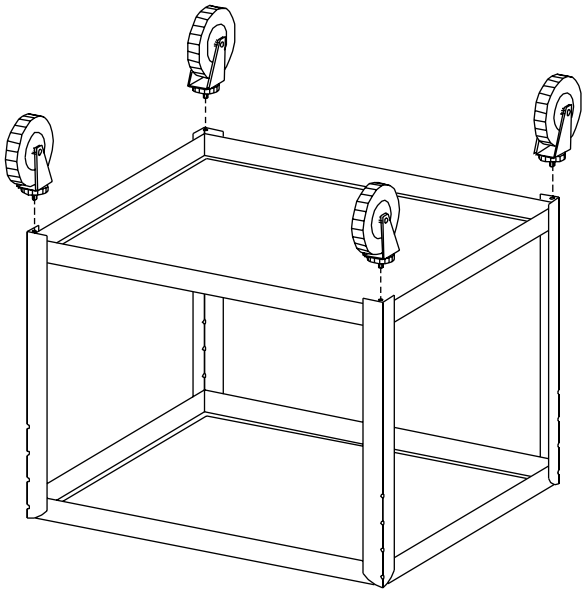

STEP 2

Turn base over and push each caster into the corner sockets. If casters do not insert easily, a rubber mallet may be used to tap casters into place.
MAKE SURE CASTERS ARE IN EACH SOCKET SECURELY.

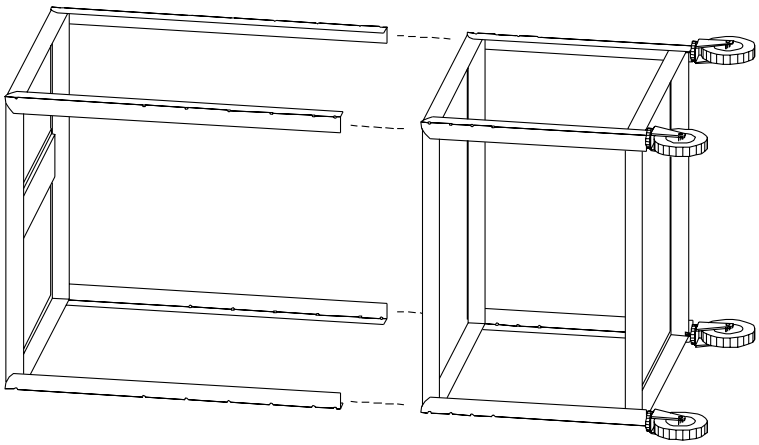

FIGURE 1

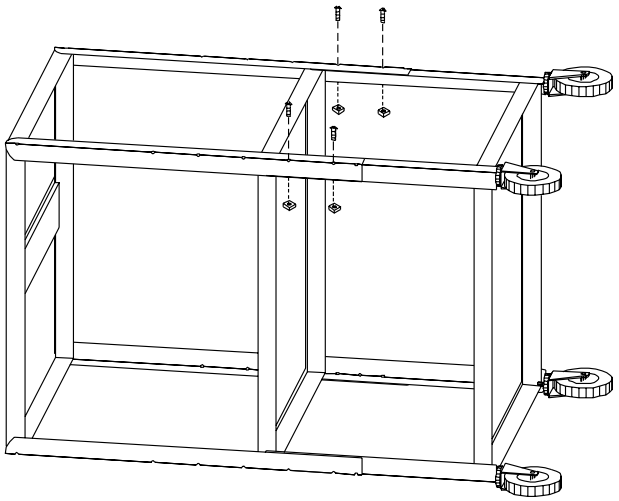

FIGURE 2

STEP 3

Lay both base and shelf assembly on their sides. Slide shelf assembly over the base **(Figure 1)**. Attach together using 2 screws (AA) and 2 nuts (BB) per leg as shown **(Figure 2)**. **NOTE:** Adjustments of cart range from 36" to 54" at 2" increments.

Bretford
11000 Seymour Avenue
Franklin Park, IL 60131
TEL: 847.678.2545
800.521.9614
FAX: 847.678.0852
800.343.1779

Bretford Ltd.
Technology House
7 Lake End Court, Taplow
Bucks SL6 0JQ England
TEL: 01628 603558
FAX: 01628 604923

www.bretford.com

Part #031-1644
Rev. 09.29.04 CH